


Sumi

SUM20 Kure

VINYL SEATING

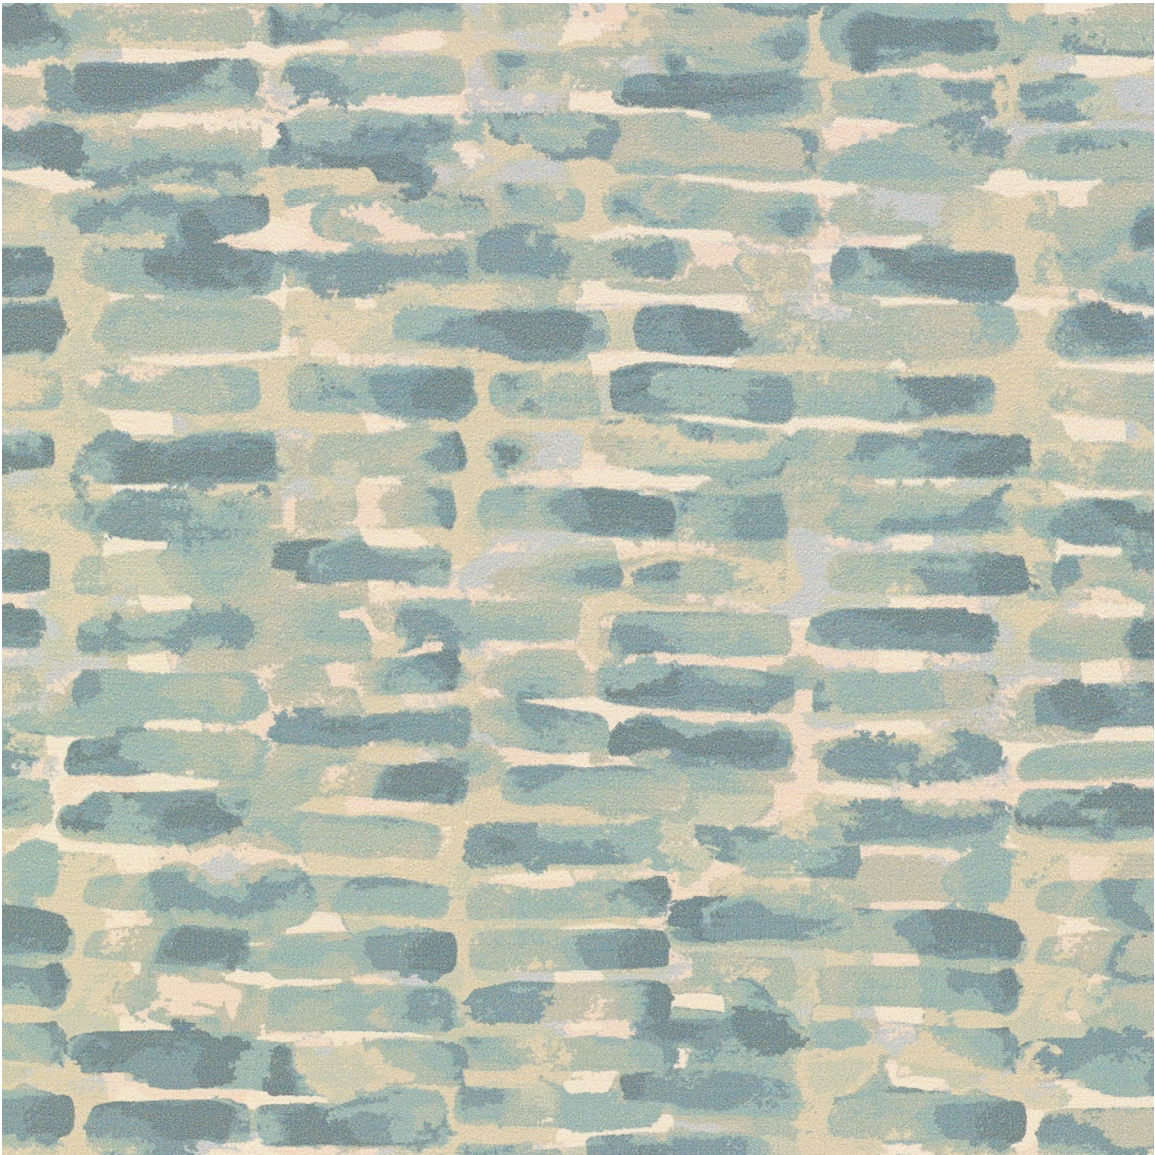

Stinson®

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- CFFA-Healthcare-201: Certified
- Denim stain resistant
- Fluid barrier
- Bleach-solution cleanable
- Enhanced fade resistance

Environmental

- GREENGUARD Gold Certified
- REACH Compliant
- RoHS Compliant
- Recycled content
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Does not contain formaldehyde
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

\*\* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications

|           |                                                                                              |
|-----------|----------------------------------------------------------------------------------------------|
| Content   | Non-Phthalate Vinyl produced using a minimum of 50% resin derived from natural raw materials |
| Finish    | Advanced Soil and Stain Resistant Top Coat                                                   |
| Backing   | 100% Post Consumer Recycled Polyester                                                        |
| Weight    | 30 oz./lin. yd. ± 1.0 oz.                                                                    |
| Width     | 54 inches                                                                                    |
| Repeat    | Horizontal: 13.25 inches, Vertical: 11.25 inches, directional                                |
| Roll Size | 30 yards                                                                                     |

Performance Characteristics

|                               |                                          |
|-------------------------------|------------------------------------------|
| Abrasion Resistance** CFFA-1  | Exceeds 100,000 double rubs - heavy duty |
| Adhesion CFFA-3               | Warp: 3.3 lbs. min., Fill: 3.3 lbs. min. |
| Break Strength CFFA-17        | Warp: 121 lbs. min., Fill: 72 lbs. min.  |
| Tear Strength CFFA-16         | Warp: 5.6 lbs. min., Fill: 5.9 lbs. min. |
| Seam Slippage CFFA-14         | Warp: 46 lbs. min., Fill: 35 lbs. min.   |
| Colorfastness to Light CFFA-2 | 1000 Hours, Class 4.5                    |
| Crocking CFFA-7               | Dry: Class 4.0, Wet: Class 4.0           |
| Fluid Barrier                 | Inherent Fluid Barrier                   |

Flammability\*

|                                                  |         |
|--------------------------------------------------|---------|
| California Technical Bulletin 117-2013 Section 1 | Passed  |
| NFPA 260                                         | Class 1 |
| UFAC                                             | Class 1 |



Stinson®

C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

cfstinson.com